


Wog Fully Welded Ball Valve



Product Description

This series of products are reliable sealing performance, maintenance-free for 20 years, switch torque light, can be installed in heat transfer stations, district heating pipe network, branch pipes, heat exchanger unit, heat transfer equipment or ancillary equipment connected to other. use for cut off . The main use of the urban heat, city gas, city water supply and drainage lines.

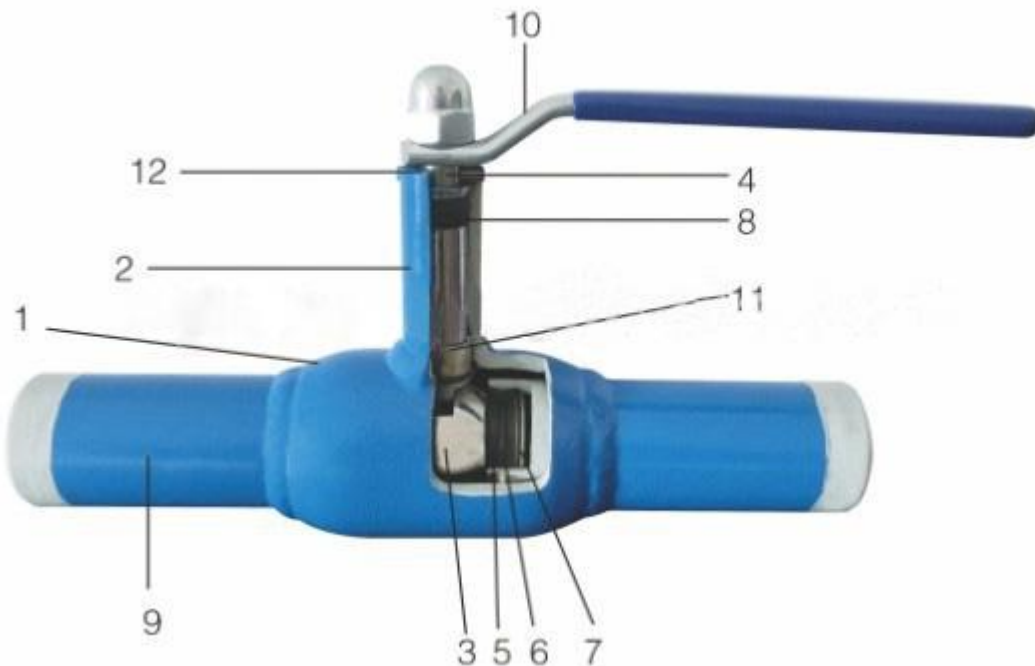

No.	Part name	Material
1	Body	Carbon steel St37.8
2	Neck	PTFE+SPCB
3	Ball	304 stainless steel
4	Stem	2Cr13
5	Seat	25%C+PTFE
6	Metal washer	60Si2Mn
7	Spring	60Si2Mn
8	"O" Ring	FPM
9	End piece	Carbon steel St37.8
10	Handle	Carbon steel +HCr
11	"O" Ring	FPM
12	Gland	304 stainless steel

Size	NPS	A	b	L	D	D1		D2
						CN	EU	
						unit:millimetre(mm)		
DN15	3/8	129	90	210	15	18	21.3	42.7
DN20	3/4	159	103	230	20	25	26.7	48
DN25	1	159	107	260	25	32	33.4	60
DN32	1-1/4	230	120	260	32	42	42.2	76
DN40	1-1/2	230	126	300	40	48	48.3	89
DN50	2	300	177	300	50	57	60.3	114
DN65	2-1/2	300	186	300	65	76	76.1	140
DN80	3	400	210	300	80	89	88.9	165
DN100	4	400	214	325	100	108	114.3	216
DN125	5	450	220	350	125	133	141.3	219
DN150	6	450	280	490	150	159	168.3	355